

## BALI



MIXED COFFEE BL05

### PERFORMANCE (as tested by ITTS Inc. USA)

STAIN RESISTANCE:	10 (AATCC-175-2003)
STATIC CONTROL:	Built-in Permanent
TUFT BIND:	6.0 lbs (ASTM-D-1335)
DIMENSIONAL STABILITY	Max 0.25% change (AACHEN)
FLAMMABILITY	
RADIANT PANEL:	0.25 W/cm2 (ASTM-E-648-06)
US FEDERAL PASSES:	(CPSC FF1-70, 16 CFR 1630, ASTM-D-2859-06)
FLAMMABILITY STD	
SMOKE DENSITY:	Max 450 (ASTM-E-662-06)
COLOURFASTNESS	
TO LIGHT:	5 (AATCC-16E)
TO WET & DRY CLEANING	5 (AATCC-165)
5 (AATCC-165):	5 (AATCC-129)

### WARRANTIES

10-year Limited Carpet Wear Warranty ,Ideal for Medium Contract Use

The subfloor should be dry, smooth, flat, dust-free and resistant to compression and load-bearing.

Where seaming is necessary, a seam sealant must be used for all such installations.

Due to dyelot variations, actual material may vary slightly from the samples.

Chair pads are recommended to prevent premature wear of carpet.




WOOD BL01



MIXED BROWN BL03



MIXED SAND BL02

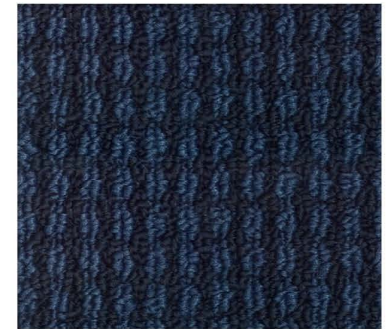

MIXED OCEAN BL04

STYLE NAME: **Bali**  
 CONSTRUCTION: 1/10" Tufted Loop Pile Graphic  
 FIBRE: 100%BCF Solution 2400 Denier  
 PILE WEIGHT: ca880g/m2 (26oz/y2)  
 TOTAL WEIGHT: ca1900g/m2 (56oz/y2)  
 PILE HEIGHT: ca2mm Low, ca6mm Hight  
 STITCH RATE: 44.5/10cm (11.1 spi)  
 SECONDARY BACKIN ActionBac  
 STANDARD ROLL SIZ13.66x30m



MIXED COFFEE BL05

\* AS IN ALL QUALITY CARPETS, COLOURS ARE SUBJECT TO DYELOT VARIATIONS.

**ANB Furnishing Pte Ltd**

No. 51 , #01-12 , Bukit Batok Crescent Unity Centre , Singapore 658077

Tel : 65-6569 3345 , Fax : 65-6569 4544