


HOLLYWOOD




MAROON HW-1H & COOL GREY HW-1B

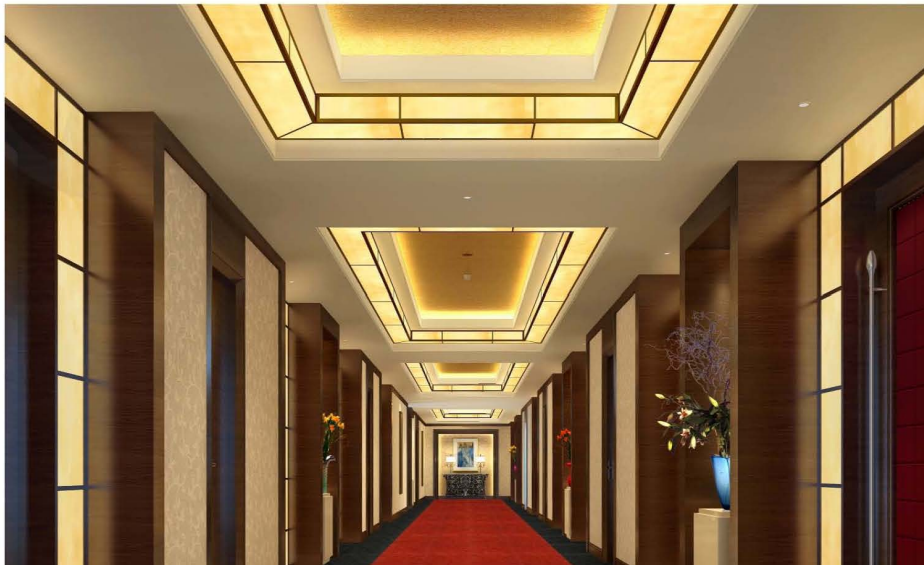

MAROON HW-1H & DARK STORM HW-1A

RECOMMENDED INSTALLATION METHODS:



QUARTER-TURN




BROWN HW-1D



COOL GREY HW-1B



MAROON HW-1H

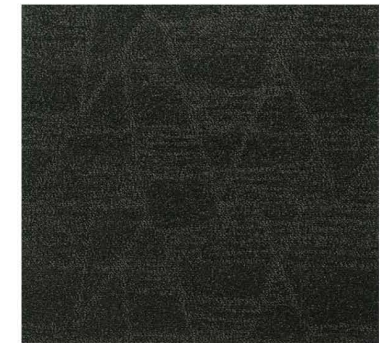

DARK STORM HW-1A



STYLE NAME:

CONSTRUCTION:

YARN:

COMPONENT:

GAUGE PER INCH:

PILE HEIGHT:

TOTAL THICKNESS:

PILE WEIGHT:

TOTAL WEIGHT:

TILE BACKING:

PRIMARY BACKING CLOTH:

TILE SIZE:

PACKING:

PERFORMANCE

ELECTROSTATIC PROPENSITY:

FLAMMABILITY:

RADIANT PANEL TEST:

COLORFASTNESS TO LIGHT:

COLORFASTNESS TO CROCKING:

ACCELERATED SOILING:

TUFT BIND:

AACHEN DIMENSIONAL STABILITY:

ROLL CHAIR TESTING:

Hollywood

High & Low Loop

Solution Dyed BCF

100% Twisted Synthetic Fiber

1/10"

3.5+/- 0.3mm

6.5mm +/- 0.5mm

20 oz/yd²

4850g/m²+/-200g/m²

PVC with Glass Fiber

Non-woven Polyester Spunbonded

50cm x 50cm

20 PCS

Less than 2.0 kv at 20% R.H. 70 deg F (AATCC 134 1996)

8 passed 8 (ASTM D 2859 96 Pill Test)

ASTM E 648-04

≥ 5 (AATCC 165)

≥ 5 (AATCC 16E)

5 (ASTM D 6540)

8.8 lbs (ASTM D 1335)

ITTS 004

ITTS 205

* AS IN ALL QUALITY CARPETS, COLOURS ARE SUBJECT TO DYELOT VARIATIONS.