


OXFORD



UNITY ASH OX19


RECOMMENDED INSTALLATION METHODS:




QUARTER-TURN

SINGAPORE GREEN LABEL:
SINGAPORE GREEN BUILDING COUNCIL:
GREEN LABEL PLUS:
TUFT BIND:
AACHEN DIMENSIONAL STABILITY:
ACCELERATED SOILING:
COLORFASTNESS TO CROCKING :

039-025-2280
039-004-1901
GLP1879
ASTM D 1335
ITTS 004
ASTM D 6540
AATCC 165

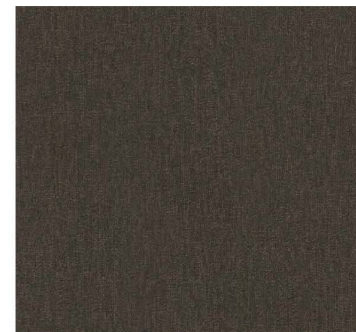

FRIENDLY BROWN OX16

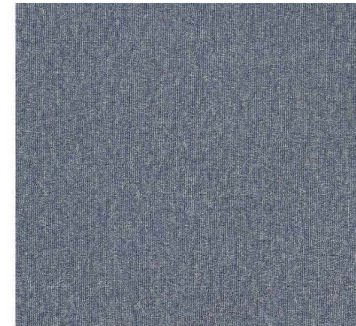

PEACE BLUE OX57

STYLE NAME:
CONSTRUCTION:
YARN:
COMPONENT:
GAUGE:
PILE HEIGHT:
TOTAL THICKNESS:
PILE WEIGHT:
TOTAL WEIGHT:
TILE BACKING:
PRIMARY BACKING CLOTH:
YARN TREATMENTS:
ANTI-SOIL, ANTI-OIL TREATMENT:
TILE SIZE:
PACKING:

PERFORMANCE

ELECTROSTATIC PROPENSITY:
FLAMMABILITY:
RADIANT PANEL :
COLORFASTNESS TO LIGHT:

* AS IN ALL QUALITY CARPETS, COLOURS ARE SUBJECT TO DYELOT VARIATIONS.



RESPECT GREY OX15



UNITY ASH OX19

Oxford

Level Loop
Solution Dyed BCF
100% Universal Nylon
1/10"
3.5mm
6.5mm +/- 0.3mm
580g/m²
4800g/m²
PVC with Glass Fiber
Non-woven Polyester Spunbonded
3M Scotchgard Permanently Anti Static
3M Scotchgard
50cm x 50cm
20 PCS

AATCC 134 1996
ASTM D 2859 Pill Test
ASTME 648 (Class 1)
AATCC 16E

