

# STARONE




**NIGHT BLUE ST05**




**GOLD BROWN ST03**

RECOMMENDED INSTALLATION METHODS:




QUARTER-TURN

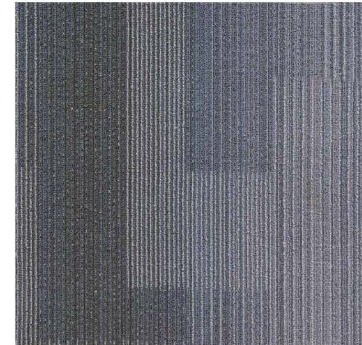

**STEEL GREY ST02**



**GOLD BROWN ST03**

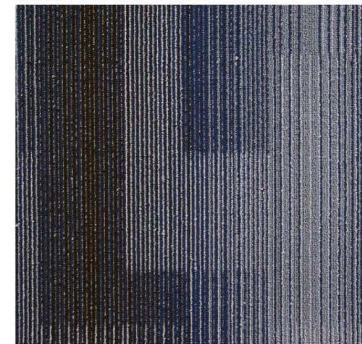

**NIGHT BLUE ST05**

**Starone**  
 Multi Level loop  
 Solution Dyed BCF  
 100% BCF Synthetic Fiber  
 1/12"  
 4.0 +/- 0.5mm  
 6.0mm +/- 0.5mm  
 16 oz/yd<sup>2</sup>  
 4300g/m<sup>2</sup> +/- 100g/m<sup>2</sup>  
 PVC  
 50cm x 50cm  
 20 PCS

**PERFORMANCE**

ELECTROSTATIC PROPENSITY: Less than 2.0 kv at 20% R.H.  
 70 deg F (AATCC 134 1996)  
 8 passed 8 (ASTM D 2859 96 Pill Test)  
 ASTM E 648-04  
 FLAMMABILITY: ≥ 5 (AATCC 165)  
 RADIANT PANEL TEST: ≥ 5 (AATCC 16E)  
 COLORFASTNESS TO LIGHT: 5 (ASTM D 6540)  
 COLORFASTNESS TO CROCKING: 8.8 lbs (ASTM D 1335)  
 ACCELERATED SOILING: ITTS 004  
 TUFT BIND: ITTS 205  
 AACHEN DIMENSIONAL STABILITY:  
 ROLL CHAIR TESTING:



\* AS IN ALL QUALITY CARPETS, COLOURS ARE SUBJECT TO DYELOT VARIATIONS.